

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number  
**WO 2005/042998 A1**

(51) International Patent Classification<sup>7</sup>: **F16D 41/08**

(74) Agent: MASSINA, Glenn, M.; Michael Best & Friedrich LLP, 100 East Wisconsin Avenue, Milwaukee, WI 53202-4108 (US).

(21) International Application Number:  
PCT/US2004/034656

(22) International Filing Date: 20 October 2004 (20.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/512,714 20 October 2003 (20.10.2003) US

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): TIMKEN US CORPORATION [US/US]; 59 Field Street, Torrington, CT 06790 (US).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): JOKI, Mark, A. [US/US]; 5930 North American Road, Dover, OH 44622 (US).

[Continued on next page]

(54) Title: CLUTCHING DEVICE

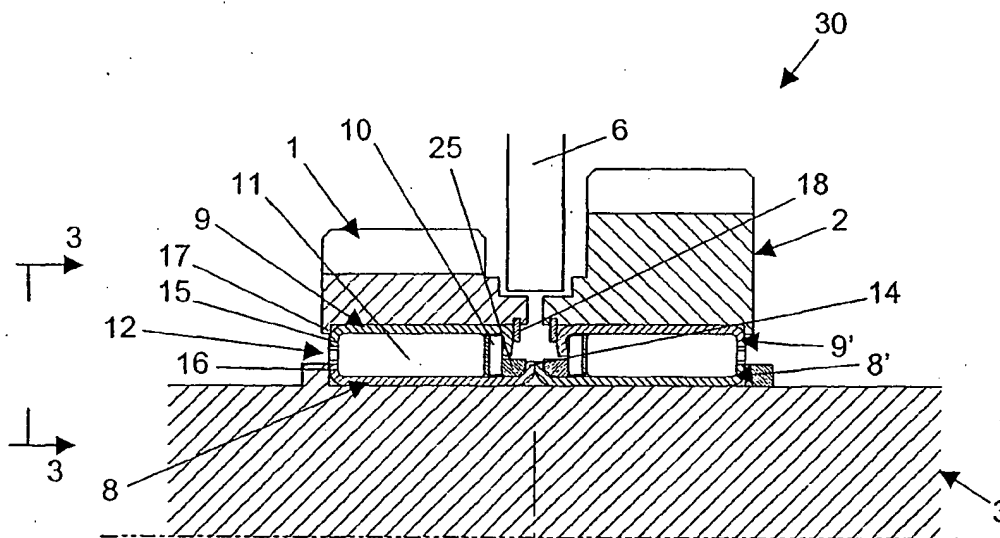

(57) Abstract: A clutching device comprising a generally cylindrical tubular slipper having a friction surface, a bearing surface, and a first interlocking member. The bearing surface has radial projections which form axially oriented recesses. A generally cylindrical coupling member has a mounting surface, a bearing surface and a second interlocking member. The bearing surface has radial projections which form axially oriented recesses such that the tubular slipper recesses and the coupling member recesses form pockets in which said rollers are located. The tubular slipper and coupling member are axially displaceable relative to one another between a first position wherein the first and second interlocking members are engaged such that the coupling member and the tubular slipper recesses are maintained in alignment and a second position wherein the first and second interlocking members are disengaged and the coupling member and the tubular slipper are free to rotate relative to one another such that the coupling member and tubular slipper recesses are misalignable.

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

2/1005  
JC05 Rec'd PCT/PTO 04 OCT 2005  
Summary

The present invention provides a clutching device comprising a generally cylindrical tubular slipper having a friction surface, a bearing surface and a first interlocking member. The bearing surface has radial projections which form axially oriented recesses. A generally cylindrical coupling member has a mounting surface, a bearing surface and a second interlocking member. The bearing surface has radial projections which form axially oriented recesses such that the tubular slipper recesses and the coupling member recesses form pockets in which said rollers are located. The tubular slipper and coupling member are axially displaceable relative to one another between a first position wherein the first and second interlocking members are engaged such that the coupling member and tubular slipper recesses are maintained in alignment and a second position wherein the first and second interlocking members are disengaged and the coupling member and the tubular slipper are free to rotate relative to one another such that the coupling member and tubular slipper recesses are misalignable. The present invention provides a novel actuation method that requires no ancillary parts for actuation. This invention replaces a cone type synchronizer device with a lower cost and narrower device.

#### Brief Description of the Drawings

Fig. 1 is a longitudinal sectional view of a gear pair with a cone synchronizer mounted on a shaft as in a manual transmission.

Fig. 2 is a longitudinal sectional view of a gear pair with a clutching device of the present invention mounted on a shaft as in a manual transmission.

Fig. 3 is a fragmentary end view of the gear, synchronizers, and shaft taken along line 3-3 of Fig. 2 with the synchronizer being disengaged.

# CLUTCHING DEVICE

## Background

5           The present invention relates to clutching devices. More particularly, the present invention relates to a clutching device for selectively coupling a gear to a shaft.

Referring to Fig. 1, a prior art clutching device for clutching a small gear 1 or a larger gear 2 to a shaft 3 upon which the gears 1, 2 are rotatably mounted is shown. To couple the shaft 3 to the small gear 1, which is rotating at a different speed than the shaft  
10 3, a shift fork 6 is moved towards the small gear 1. The shift fork 6 pushes against ring 7 which is rotationally fixed to shaft 3, but axially moveable. The inner teeth edge of ring 7 contact and drive outer cone member 5 which in turn, contacts and applies rotational torque to the inner cone member 4 which is rotationally fixed to the small gear 1. The profile on the edge of inner teeth of ring 7 and the edge of outer teeth on outer cone  
15 member 5 block further axial movement of ring 7 while accelerating torque is being transferred from ring 7 to outer cone member 5. When the small gear 1 is approximately the same speed as the shaft 3, there is no longer significant accelerating torque transmitted and the ring 7 is no longer axially blocked by the outer cone member 4, allowing it to axially move to engage the outer teeth of inner cone member 4 which rotationally fixes the  
20 small gear 1 to the shaft 3. The larger gear 2 is coupled to the shaft 3 in a similar manner by moving the shift fork 6 toward the larger gear 2.

US Patent No. 6,409,001 discloses a clutching device that can selectively couple a gear to a shaft. This device requires a number of parts that are needed to engage and disengage the clutch.

### Description of the Preferred Embodiments

Referring to Figs. 2 and 3, a clutching device 30 that is a first embodiment of the present invention will be described. The clutching device 30 includes a tubular slipper 8 loosely fit over shaft 3. The inner periphery of the tubular slipper 8 forms a cylindrical frictional surface 19. The outer periphery of the tubular slipper 8 has a bearing surface with radial projections 20 forming a series of axial recesses 21 as described in US 6,409,001. The tubular slipper 8 is not fully circular but has an axial gap 24 to facilitate radial contraction (see Fig. 3).

A coupling member 9 has a cylindrical outer periphery press-fit into the small gear 1. The coupling member 9 is preferably retained axially with respect to the small gear 1 by a shoulder 17 formed on the small gear 1 and a snap ring 18 retained by the small gear 1. Other means may also be utilized to axially retain the coupling member 9 with respect to the small gear 1. The inner cylindrical surface of the coupling member 9 has a bearing surface with radial projections 22 forming a series of axial recesses 23 in a similar pattern to the tubular slipper 8. Rollers 11 are placed in the radial gap formed between the tubular slipper 8 and the coupling member 9 – indeed, in the recesses 21, 23 in the tubular slipper 8 and the coupling member 9.

On one end of both the tubular slipper 8 and the coupling member 9 are formed first radial flanges 15, 16 with a rotationally interlocking feature 12. In the preferred embodiment, the interlocking feature 12 includes a series of internal and external involute splines 26 formed on the radial flanges 15, 16. Other means for interlocking the tubular slipper 8 and coupling member 9 may also be utilized. When the interlocking feature 12 is engaged, the recesses 19 in the tubular slipper 8 and the recesses 23 in the coupling member 9 are substantially radially opposed, creating looseness of the rollers 11 between these two members 8 and 9.

A second radial flange 14 on the tubular slipper 8 traps the rollers 11. A wave spring 10 is positioned between the rollers 11 and a spacer 25 in contact with the flange 14. The wave spring 10 keeps the rollers 11 seated against the first radial flange 16 of the tubular slipper 8. A second radial flange 13 on the coupling member 9 also traps the rollers 11. The wave spring 10 acts between the rollers 11 the flange 13 of the coupling member 9 to bias the coupling member 9 to the right, as illustrated, thereby maintaining the interlocking feature 12 in an engaged positioned. In this condition, the tubular slipper 8 is loose on the shaft 3 and very little torque transfers between the small gear 1 and the shaft 3.

When driving through the small gear 1 is desired, the shift fork 6 pushes the small gear 1 to the left, causing the coupling member 9 to move with it against the force of the spring 10. The tubular slipper 8 is retained axially, and therefore, the coupling member 9 moves axially relative to the tubular slipper 8, with the coupling member flange 15 moving out of axial alignment with the tubular slipper flange 16. As such, the interlocking feature 12 splines 26 disengage from each other and the coupling member 9 and tubular slipper 8 are rotatable relative to one another. The driven small gear 1 moves relative to the shaft 3 and experiences a slight drag from the contact of the tubular slipper 8 on the shaft 3. The drag torque causes the tubular slipper 8 to move relative to the coupling member 9, causing the rollers 11 to contact the sides of the recesses 21, 23. The contact of the rollers 11 with the recesses 21, 23 causes the tubular slipper 8 to reduce in diameter, which increases the drag torque. The high pressure angle of the contact of the rollers 11 with the sides of recesses 21, 23, causes the tubular slipper 8 to lock on the shaft 3 and power is transferred from the small gear 1 to the shaft 3 by the friction caused by the high normal forces of the tubular slipper 8 on the shaft 3.

The present clutching device 30 has been described with respect the small gear 1. The larger gear 2 is aligned with a second tubular slipper 8' and coupling member 9' and functions in the same manner as previously described. While the present invention is described with respect to a shaft having small and larger gears 1 and 2, the clutching  
5 device 30 may be utilized with various shaft and gear assemblies. Additionally, while the present invention has been described with the tubular slipper positioned about the shaft and the coupling member is fixed to the gear, the configuration may be reversed with the coupling member fixed to the shaft and the tubular slipper engaging the gear. In such a configuration, relative rotation between the tubular slipper and the coupling member  
10 causes the rollers to engage the side walls of the recesses and thereby expand the tubular slipper which in turn causes the slipper to lock to the gear.

\*

\*

\*

## Claims

1. A clutching device comprising:

a generally cylindrical tubular slipper having a friction surface and a bearing surface with an axial slit extending between the friction surface and a bearing surface, the bearing surface having radial projections which form axially oriented recesses, the tubular slipper including a first interlocking member; and

a generally cylindrical coupling member having a mounting surface and a bearing surface, the bearing surface having radial projections which form axially oriented recesses such that the tubular slipper recesses and the coupling member recesses form pockets in which said rollers are located, the coupling member including a second interlocking member,

wherein the tubular slipper and coupling member are axially displaceable relative to one another such that in a first position the first and second interlocking members are engaged such that the coupling member recesses and the tubular slipper recesses are maintained in circumferential alignment, and in a second position the first and second interlocking members are disengaged such that the coupling member and the tubular slipper are free to rotate relative to one another whereby the coupling member recesses and the tubular slipper recesses are circumferentially misalignable.

2. The device according to claim 1 wherein the first interlocking member is defined on a first radial flange extending from the tubular slipper and the second interlocking member is defined on a first radial flange extending from the coupling member.

3. The device according to claim 2 wherein in the first position, the tubular slipper first radial flange is axially aligned with the coupling member first radial flange.



4. The device according to claim 3 wherein the tubular slipper has a second radial flange spaced from the tubular slipper first flange and the clutching member has a second radial flange spaced from the coupling member first flange with the rollers positioned between the tubular slipper first and second flanges and between the coupling member first and second flanges, and wherein an axially acting spring is positioned between the rollers and the tubular slipper and coupling member second flanges such that the spring biases the tubular slipper and coupling member first flanges in to axial alignment.

10

5. The device according to claim 4 wherein the tubular slipper has an axial length greater than an axial length of the coupling member and a spacer is positioned between the tubular slipper second flange and the spring.

15

6. The device according to claim 2 wherein the first and second interlocking members are defined by a series of internal and external involute splines formed on the tubular slipper and coupling member first flanges.

20

7. The device according to claim 1 wherein in the second position, the coupling member rotates at a different speed than the tubular slipper thereby causing the rollers to move against the projections such that the tubular slipper is contracted.

25

8. The device according to claim 1 wherein in the second position, the coupling member rotates at a different speed than the tubular slipper thereby causing the rollers to move against the projections such that the tubular slipper is expanded.

9. The device according to claim 1 wherein the coupling member is displaced relative to the tubular slipper by a shift fork.

10. The device according to claim 1 wherein the tubular slipper is mounted about a shaft and the coupling member is fixed to a first gear rotatable about the shaft.

11. The device according to claim 1 wherein the coupling member is fixed to a shaft and the tubular slipper is engaged by a first gear rotatable about the shaft.

12. A clutching device for coupling a first gear to a shaft, the clutching device comprising:

a generally cylindrical tubular slipper having a friction surface and a bearing surface with an axial slit extending between the friction surface and a bearing surface, the friction surface engaging either the shaft or the first gear and the bearing surface having radial projections which form axially oriented recesses, the tubular slipper including a first interlocking member; and

a generally cylindrical coupling member having a mounting surface and a bearing surface, the mounting surface fixed to the other of the shaft or the first gear and the bearing surface having radial projections which form axially oriented recesses such that the tubular slipper recesses and the coupling member recesses form pockets in which said rollers are located, the coupling member including a second interlocking member,

wherein the tubular slipper and coupling member are axially displaceable relative to one another such that in a first position the first and second interlocking members are engaged such that the coupling member recesses and the tubular slipper recesses are maintained in circumferential alignment, and in a second position the first and second interlocking members are disengaged such that the coupling member and the tubular

slipper are free to rotate relative to one another whereby the coupling member recesses and the tubular slipper recesses are circumferentially misalignable.

13. The device according to claim 12 wherein the first interlocking member is  
5 defined on a first radial flange extending from the tubular slipper and the second interlocking member is defined on a first radial flange extending from the coupling member.

14. The device according to claim 13 wherein in the first position, the tubular  
10 slipper first radial flange is axially aligned with the coupling member first radial flange.

15. The device according to claim 14 wherein the tubular slipper has a second radial flange spaced from the tubular slipper first flange and the clutching member has a second radial flange spaced from the coupling member first flange with the rollers  
15 positioned between the tubular slipper first and second flanges and between the coupling member first and second flanges, and wherein an axially acting spring is positioned between the rollers and the tubular slipper and coupling member second flanges such that the spring biases the tubular slipper and coupling member first flanges in to axial alignment.

20

16. The device according to claim 15 wherein the tubular slipper has an axial length greater than an axial length of the coupling member and a spacer is positioned between the tubular slipper second flange and the spring.

17. The device according to claim 13 wherein the first and second interlocking members are defined by a series of internal and external involute splines formed on the tubular slipper and coupling member first flanges.

5 18. The device according to claim 12 wherein the tubular slipper is positioned about the shaft and when in the second position, the coupling member rotates at a different speed than the tubular slipper thereby causing the rollers to move against the projections such that the tubular slipper is contracted against the shaft.

10 19. The device according to claim 12 wherein the tubular slipper is engaged with the first gear and when in the second position, the coupling member rotates at a different speed than the tubular slipper thereby causing the rollers to move against the projections such that the tubular slipper is expanded in to locked engagement with the first gear.

15 20. The device according to claim 12 wherein the coupling member is displaced relative to the tubular slipper by a shift fork.

21. The device according to claim 20 further including a second gear  
20 positioned about the shaft with a second clutching device, including a second tubular slipper and a second coupling member, therebetween and wherein the shift fork is moveable between a first position wherein neither the first or second gear is engaged, a second position wherein the first gear is engaged and a third position wherein the second gear is engaged.

25

22. The device according to claim 12 wherein the tubular slipper is mounted about the shaft and the coupling member is fixed to the first gear.

23. The device according to claim 12 wherein the coupling member is fixed to  
5 the shaft and the tubular slipper is engaged by the first gear.

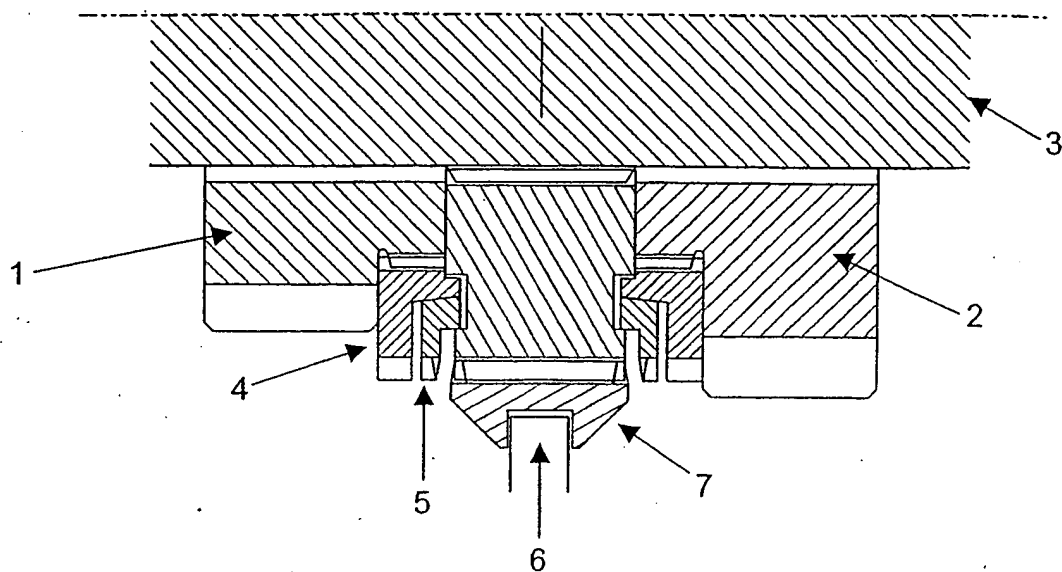


Figure 1


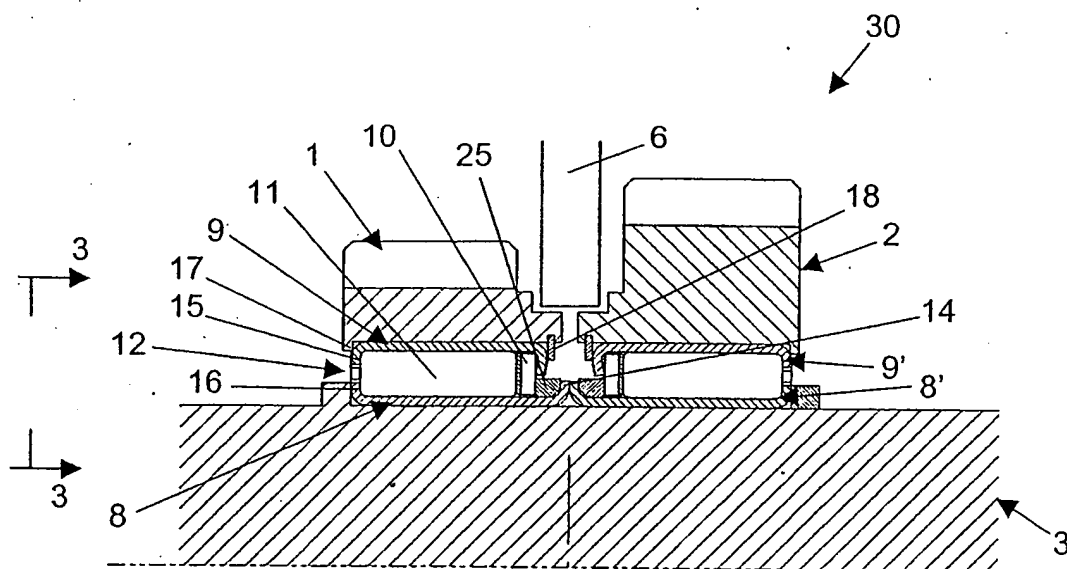


Figure 2

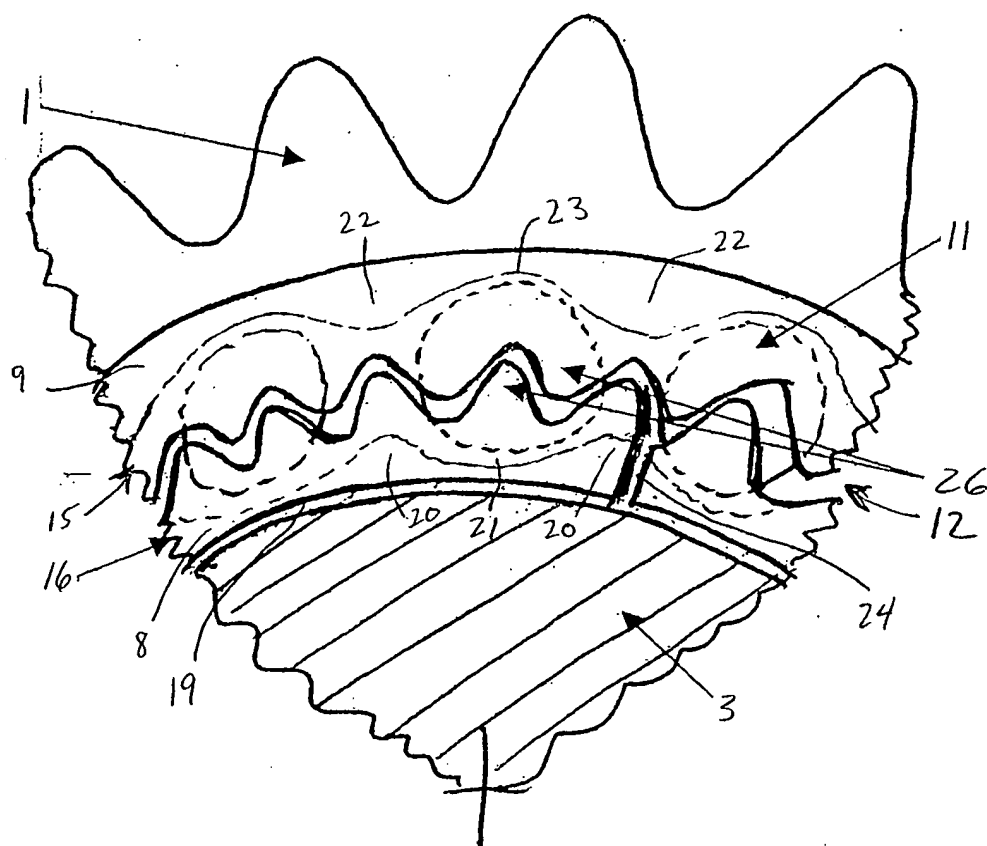

### Figure 3

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2004/034656A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 F16D41/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F16D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/104397 A1 (BOWEN THOMAS C) 8 August 2002 (2002-08-08) paragraph '0015! - paragraph '0020!; figures 1,2	1,12
A	US 2002/155914 A1 (WILLIAMS RANDOLPH C ET AL) 24 October 2002 (2002-10-24) abstract; figures 2-11d	1,12
A	US 5 005 683 A (RITTER ET AL) 9 April 1991 (1991-04-09) the whole document	1,12



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

1 February 2005

Date of mailing of the international search report

09/02/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax. (+31-70) 340-3016

Authorized officer

Van Overbeeke. J



Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2002104397	A1	08-08-2002	NONE		
US 2002155914	A1	24-10-2002	US	2004106489 A1	03-06-2004
			EP	1253342 A1	30-10-2002
US 5005683	A	09-04-1991	DE	3902804 A1	02-08-1990
			DE	58905169 D1	09-09-1993
			EP	0380780 A1	08-08-1990
			ES	2041950 T3	01-12-1993
			JP	2236023 A	18-09-1990